

SOS-Gateway SOS-Button

SWISSPHONE



The smart emergency call solution for every situation

You can trigger an alert at any time using the Bluetooth-enabled SOS-Button when you integrate the SOS-Gateway into the Swissphone SOS-Portal. Incoming alert messages will automatically be handled and forwarded based on the custom configuration. The right measure can be initiated immediately and automatically thanks to the personalised information available, such as alerting a third party or mobilising security or ambulance services.

Key performance features

-))) Sending of silent alerts
-))) Suitable for large numbers of users, can be personalised
-))) Convenient to send event or location
-))) Faster than a phone call or SMS

Immediate assistance in any emergency situation

CALLING FOR HELP

When in doubt: Simply press the SOS-Button to call for help.

SILENT ALERTS

Quickly send a (silent) alert if there is no time for a phone call or a message.

Just a few steps for more safety

INSTALLATION AND IMPLEMENTATION OF LARGE NUMBERS OF USERS

The SOS-Gateway can be installed quickly thanks to straightforward setup and a variety of communication channels such as mobile Networks or Wi-Fi and the integration of the SOS-Button is done within a few minutes.

STRUCTURE OF INDIVIDUAL ALARM CHAINS

Simple to define individual alarm chains in the alert management system in order to enable the right type of assistance to arrive at the right place at the right time.

VARIETY OF ALERT TYPES POSSIBLE

It is possible to transmit several different types of alerts or events depending on the pushing frequencies of the SOS-Button.

SOS-Gateway




	Performance features	Technical data
Processor	Chipset RAM Memory	1,2 GHz Quad-Core CPU 1 GB LPDDR2 SDRAM 4 GB industrial grade micro SD
Connections	Bluetooth WLAN LAN Mobile Network (optional)	V 4,1 EDR Class 1 - Low Energy (2,4 GHz) 802.11 b / g / n 100-MBit/s Ethernet, RJ45 Mobile Network 2G/3G, Mini - SIM
Area of application	Temperature	-10 ° C / +55 ° C
Housing	Material Dimensions (H x W x D) Weight	Lupoy - UL 94, hardly inflammable 128 x 128 x 38 mm 196 x 128 x 38 mm (Optional Mobile Network) 210 g

SOS-Button



	Performance feature	Technical data
Processor	Chipset Channel Spacing	8051 based CC2541 by Texas Instruments 256 kB flash, 8 kB RAM
Connections	Bluetooth Frequency	Low Energy technology 2,4 GHz
Transmission power	Bluetooth	0 dBm
Battery and performance	Battery type Rated voltage Capacity Operating time	CR 2032, 220mAh 3V 220 mAh up to 2 years standby
Housing	Material Resistance Characteristics Dimensions (H x W x D) Weight (incl. battery)	PA6 Wellmid 6000 GS 30 and PA / ABS Bayblend T65 Flame resistant water resistant 38 x 38 x 14 mm 18 g

Triggering and alerting process

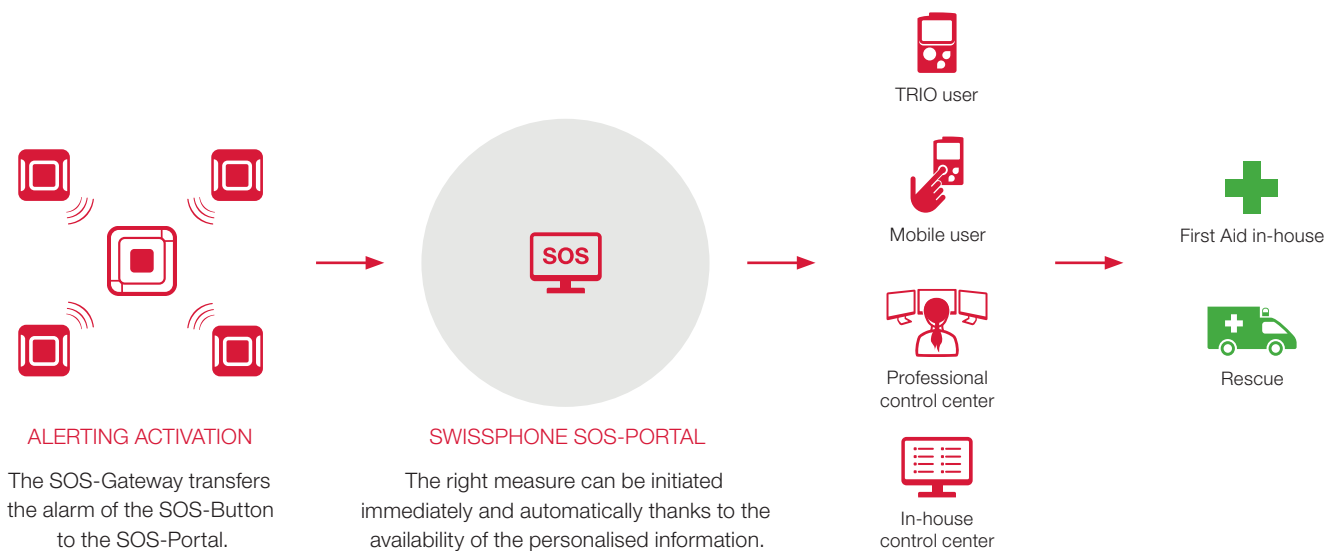

Swissphone Wireless AG
Fälmsstrasse 21
CH-8833 Samstagern
Tel. +41 44 786 77 70
Fax +41 44 786 77 71
E-Mail info@swissphone.com

Swissphone Telecommunications GmbH
Industriestraße 51
D-79194 Gundelfingen
Tel. +49 761 59 05 0
Fax +49 761 59 05 100
E-Mail vertrieb@swissphone.de

Swissphone Austria GmbH
Dresdnerstraße 68
A-1200 Wien
Tel. +43 1 493 13 41
Fax +43 1 493 13 41 17
E-Mail office@swissphone.at